

SPIDER 18.95

TRACKED AERIAL WORKING PLATFORMS

EN



PLATFORM

B A S K E T

RAISING THE STANDARD

Fengyuan 峰源(中國)有限公司
FENG YUAN (CHINA) CO., LTD.

Tel : (+852) 2712 2181
E-mail : sales@fengyuan.com.hk

Made in Italy

SERIES SPIDER 18.95




An optimized outreach for our best seller

- Side outreach of 9.6 m
- Available with Kubota Diesel engine and automatic accelerator or in the version endothermic engine + Lithium-Ion batteries or completely electric with batteries
- 230 kg of loading capacity in the basket
- Radio remote control with DISPLAY as standard equipment
- Versatility and modularity in the choice of accessories

- Diagnostic display in the ground panel and PBT (Platform Basket Telematics)
- Total protection of the chassis with steel covers.
- Supplied with air/water and 230Vac in the basket as standard equipment.
- Interchangeable hydraulic winch with 250 kg of loading capacity as optional accessory.



campbell.co.uk 4372

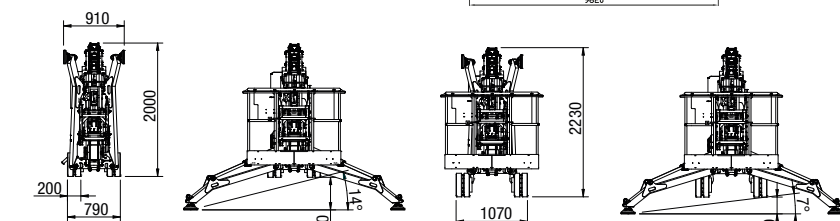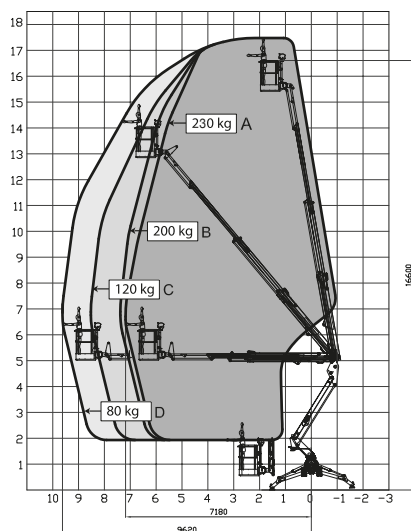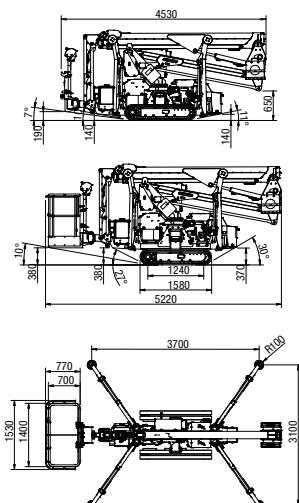

TECHNICAL SPECIFICATIONS		STD	E	ED
Maximum working height	m	17,60		
Floor height	m	15,60		
Maximum side outreach (80kg)	m	9,60		
Maximum side outreach (140kg)	m	8,60		
Rotation angle of the tower	°	360		
Aluminium basket dimensions	m	1,50 x 0,70		
Basket rotation angle	°	90+90		
Maximum capacity of basket	Kg	230		
Length closed (basket disassembled)	m	5,00 (4,36)		
Minimum width closed	mm	780		
Minimum height closed	mm	1990		
Overall dimensions Stabilization	m	3,00 x 3,66		
Maximum horizontal inclination	degrees/%	16° (29%)		
Maximum side inclination	degrees/%	17° (31%)		
Maximum speed	Km/h	1,5/2,5	0,8/1,5	1,5/2,5
WEIGHTS		STD	E	ED
Weight in work conditions*	Kg	2.350*	2.500*	2650*
Ground pressure stowed machine	KN/m ²		3,69	
Ground pressure when on stabilizers	KN/m ²		2,52	
Max point load on one stabilizer	KN		17,50	
POWER		STD	E	ED
Honda iGX390 petrol engine	HP/rpm	13/3600	-	13/3600
Z482 Kubota diesel engine	HP/rpm	13/3200	-	13/3200
Electric Motor 230Vac/50Hz (110Vac/60Hz)	CV/KW	2,20/3 (1,50/2)	2,20/3 (1,50/2)	2,20/3 (1,50/2)
Electric Motor 24 Vdc	CV/KW	-	3,5/4,8	3,5/4,8
Traction battery capacity	Ah	-	210	210
24Vdc Lead Acid			300	300
24Vdc Lithium Ion				

* Subject to change depending on configuration.