

SPIDER 22.10

TRACKED AERIAL WORKING PLATFORMS

EN



PLATFORM

B A S K E T

Fengyuan 峰源(中國)有限公司
FENG YUAN (CHINA) CO., LTD.

Tel : (+852) 2712 2181
E-mail : sales@fengyuan.com.hk


RAISING THE STANDARD

Made in Italy

SERIES SPIDER 22.10

Light & high performance

- Ultra-light and easy to transport
- 230 kg in the basket
- Electric battery or HYBRID version on request
- Easy access to every component subject to maintenance.
- Simple but precise to use.
- Equipped with radio remote control
- Triple stabilization set up and automatic outreach
- Multi-width stabilizer settings to enable machine to set up in confined spaces
- Air & Water & 220 Vac outlets into the basket
- Cage interchangeable with winch (optional)

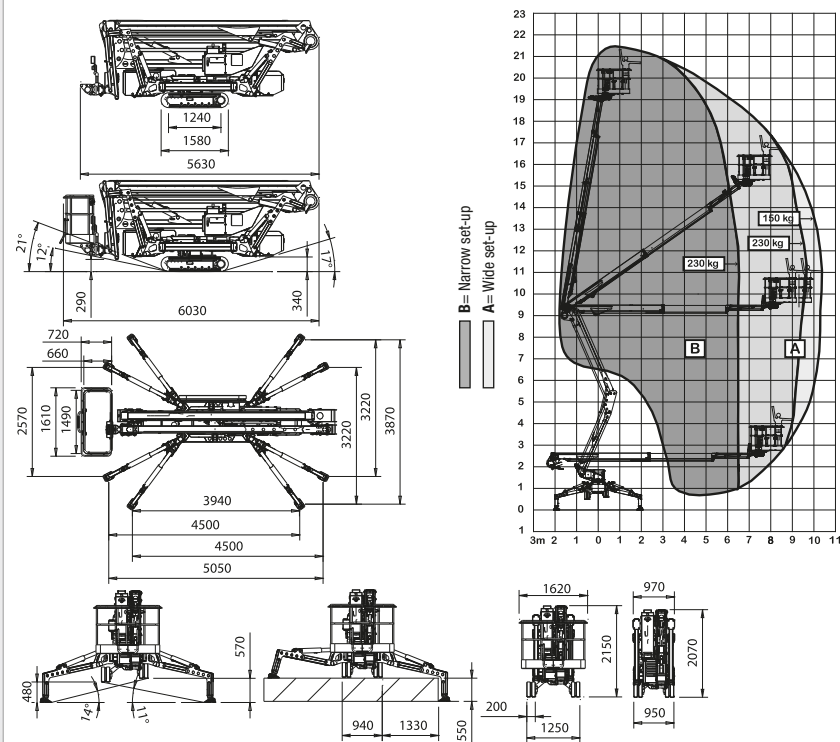

TECHNICAL SPECIFICATIONS		STD	E	ED
Maximum working height	m	21,70		
Floor height	m	19,70		
Maximum side outreach	m	10,30		
Rotation angle of the tower	°	365		
Aluminium basket dimensions	m	1,50 x 0,70		
Basket rotation angle	°	90+90		
Maximum capacity of basket	Kg	230		
Length closed (basket disassembled)	m	5,97 (5,28)		
Minimum width closed	m	0,98		
Minimum height closed	m	2,06		
Overall dimensions	Wide	3,87 x 3,94		
Stabilization	Narrow	2,57 x 5,05		
Maximum horizontal inclination	degrees/%	16° (29%)		
Maximum side inclination	degrees/%	17° (31%)		
Maximum speed	Km/h	1,5	0,8	1,5
WEIGHTS		STD	E	ED
Weight in work conditions*	Kg	2980*	3260*	3260*
Ground pressure stowed machine	KN/m²	2,94	3,21	3,21
Ground pressure when on stabilizers	KN/m²	1,91	2,09	2,09
Max point load on one stabilizer	KN	21	23	23
POWER		STD	E	ED
Z602 Kubota diesel engine	HP/rpm	14/3600	-	14/3600
Electric motor 220 Vac	CV/KW	3 / 2,2	3 / 2,2	-
Electric Motor 24 Vdc	CV/KW	-	7,4/5,5	7,4/5,5
Traction battery capacity	24Vdc Lead Acid 24Vdc Lithium Ion	Ah	2x210 400	1x210 300
Battery charger	lead acid lithium ion	Ah	45 100/50	45 100/50

* Subject to change depending on configuration.