

UT SERIES / MANUALLY PROPELLED MULTI MAST

Up-Lift UT multi mast machines are compact and light weight in construction. Their high strength extruded aluminium masts provide stable platforms for personnel undertaking prolonged aerial work. The sliding rail design UT series are available in nine standard platform heights

Key Features


- Power point on platform
- Two person capacity for UT40 or lower models
- Compact retractable cage to below platform
- Go through standard door for UT36 or lower models
- Non marking wheels
- Hour meter
- Laser position locator *
- AC/DC model
- Heavier models have optional outrigger drive wheels

Safety Features

- Emergency down valve
- Enabling control buttons
- Emergency stop button
- Back-up battery (AC model) for descend
- Ground and platform control system
- Spirit level indicator
- Descend alarm
- Low charge indicator (DC models)
- Safety harness point
- Flashing light and warning decals
- Safety relief valves



KEY TECHNICAL SPECIFICATIONS

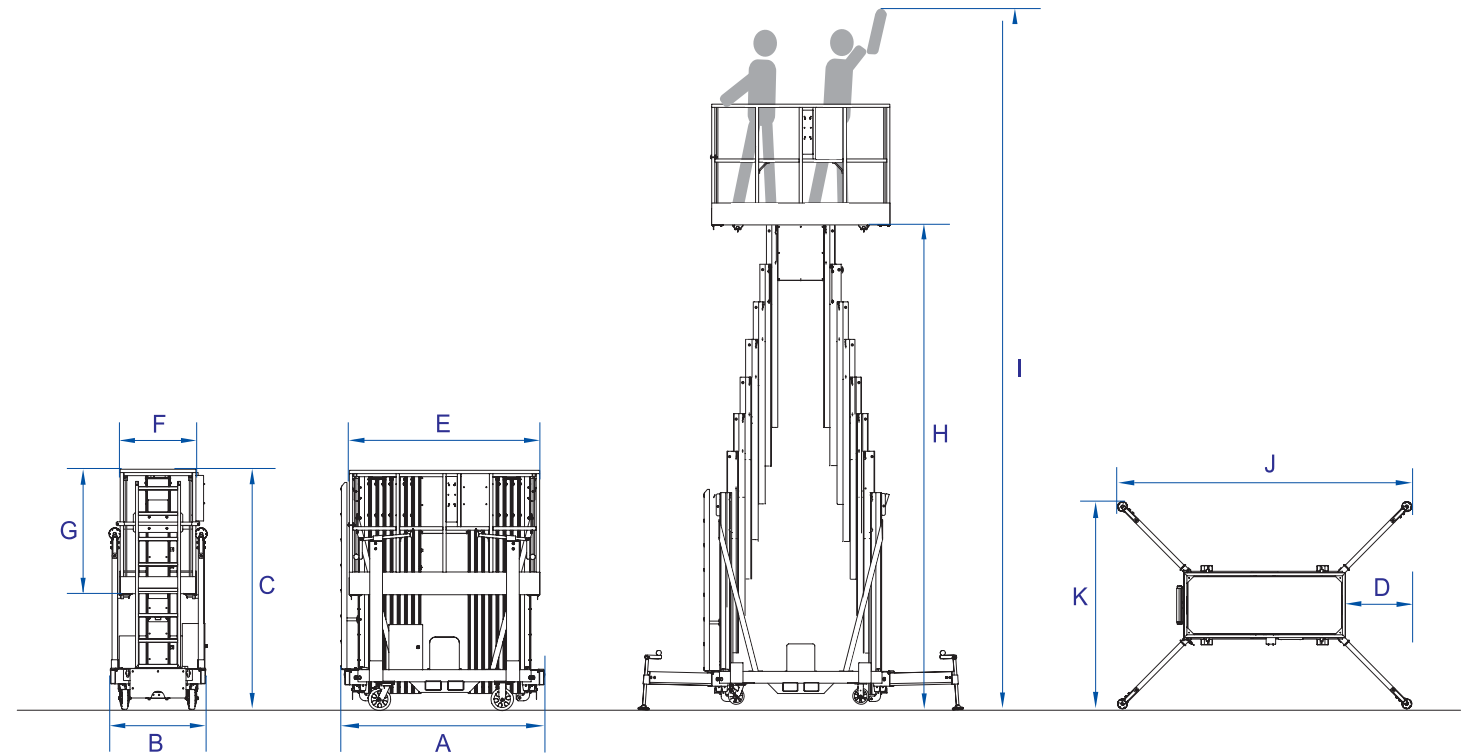

Model	UT20	UT23	UT26	UT33	UT36	UT40	UT46**	UT52**	UT58**
Max Platform Height (m) H	6.1	7.2	8.0	10.1	11.0	12.3	14.2	16.0	18.0
Max Working Height (m) I	8.1	9.2	10.0	12.1	13.0	14.3	16.2	18.0	20.0
Rated Load (kg)	200	200	200	200	200	200	150	150	150
Stored Dimensions (m) A*B*C	1.6X0.86X1.8	1.6X0.86X2.0	1.6X0.86X2.0	1.8X0.86X2.0	1.8X0.86X2.0	1.8X0.86X2.1	2.0X0.90X2.8	2.0X0.90X2.8	-
Stored Dimensions (m) A*B*C (with drive wheel)	-	-	-	-	-	-	2.4x0.90x2.8	2.4x0.90x2.8	2.4x1.24x2.1
No. of Person in Platform	2	2	2	2	2	2	1	1	1
Platform Dimensions (m) E*F*G	1.5x0.7x1.1	1.5x0.7x1.1	1.5x0.7x1.1	1.7x0.7x1.1	1.7x0.7x1.1	1.7x0.7x1.1	1.9x0.7x1.1	1.9x0.7x1.1	2.0x0.8x1.1
Voltage AC/DC Model (V)	230/12	230/12	230/12	230/12	230/12	230/12	230/12	230/12	230
Outrigger Foot-Print (m) K*J	1.60x2.30	1.60x2.30	1.60x2.30	2.10x3.10	2.10x3.10	2.40x3.40	2.40x2.80 (swing out)	2.40x2.80 (swing out)	2.90x3.80 (swing out)
Wall Access Distance (m) f	0.68	0.68	0.68	0.68	0.68	0.68	0.42	0.42	0.42
Total Weight AC/DC Model (kg)	500/542	540/582	580/622	620/662	680/722	755/797	1386/1470	1420/1504	2380
Power Rating AC/DC Model (kW)	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.1/1.6	1.5+2.5
Power Rating-Drive Wheel (kW)	-	-	-	-	-	-	0.75	0.75	0.75

Company reserves the right to change product design & technical features without prior notice.

** For models UT46, UT52, UT58, outrigger will be swing-out type. Optional drive wheel for UT46, UT52, UT58.



* Optional Item. Standard item for Australia