

UC SERIES / MANUALLY PROPELLED CENTRAL RAIL

The UC low level access series are direct ladder replacement work platforms with working heights ranging from 4.2m to 5.6m. They provide a much safer working environment than ladders and minimize the risk of injury. The UC series advance design and compact structure makes these lifts simple and easy to operate. They are ideally suited for tight working areas where larger work platforms cannot be used.

Key Features


- Forklift pockets and tool box
- Up to 200 operating cycles per full charge
- Hour meter
- Free-standing operation with rechargeable battery
- 12 Volt AGM battery power
- Highly reliable electrically powered hydraulic system
- Battery charge indication
- Non-marking wheels

Safety Features

- Safety bars for maintenance
- Audible descend and tilt alerts
- Dual control points include emergency stops
- Ergonomic platform (non-slip floor & secure gating)
- Low charge and low battery indicator
- Spirit level indicator
- Descend alarm
- Warning decals
- Back-up power for emergency descend
- Emergency down valve
- Safety harness point



KEY TECHNICAL SPECIFICATIONS

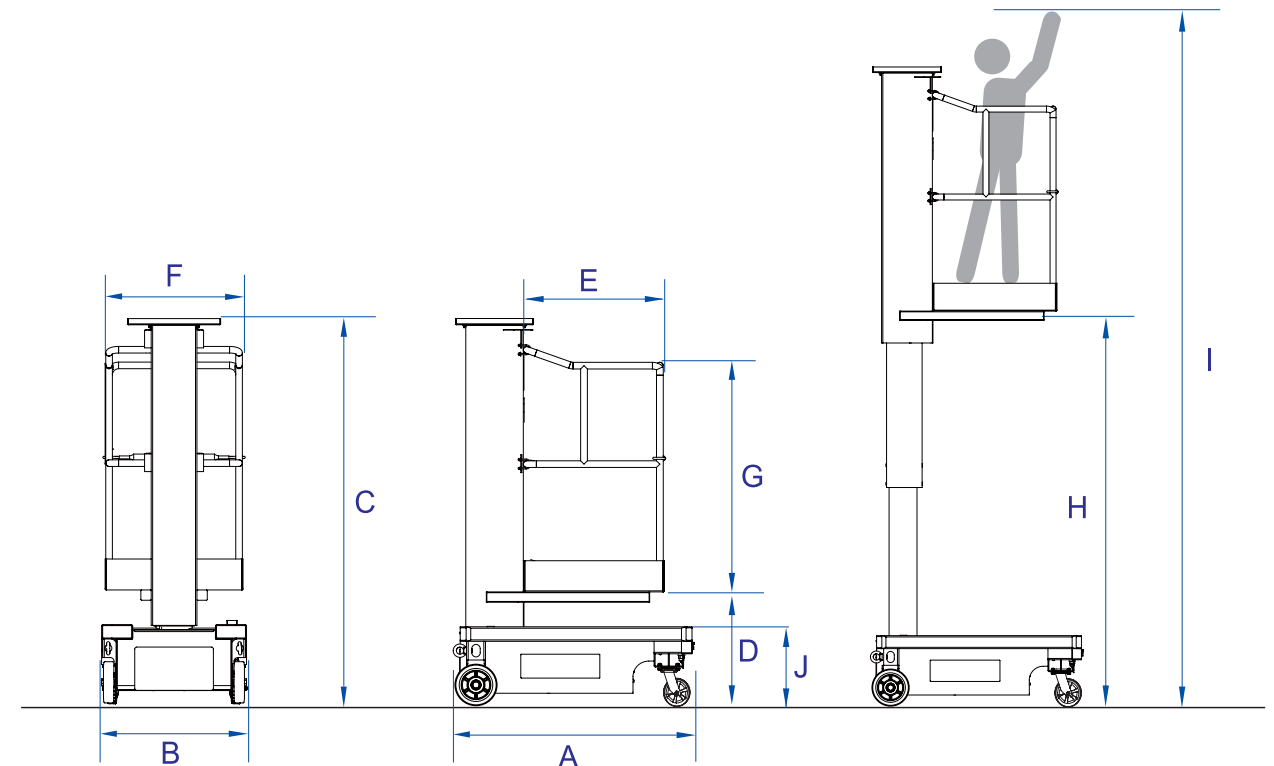

Model	UC7	UC8	UC10	UC12
Max Platform Height (m) H	2.2	2.6	3.0	3.6
Max Working Height (m) I	4.2	4.6	5.0	5.6
Rated Load (kg)	159	159	159	159
Stored Dimensions (m) A*B*C	1.10x0.7x1.86	1.10x0.7x1.86	1.10x0.7x1.86	1.10x0.7x1.86
Platform Dimensions (m) E*F*G	0.68x0.66x1.1	0.68x0.66x1.1	0.68x0.66x1.1	0.68x0.66x1.1
Battery (V/Ah)	12 / 110	12 / 110	12 / 110	12 / 110
Total Weight (kg)	284	288	329	378
Power Rating (kW)	1.2	1.2	1.2	1.2
Foot Print (m)	0.60x0.96	0.60x0.96	0.60x0.96	0.60x0.96
Initial Platform Height (m) D	0.63	0.63	0.63	0.63
Initial Step Height (m) J	0.37	0.37	0.37	0.37
Platform Travel (m)	1.57	1.97	2.37	2.97
Max. Allowable Manual Force (N)	200	200	200	200
Max. Allowable Inclination of Chassis (deg.)	1.5	1.5	1.5	1.5

Company reserves the right to change product design & technical features without prior notice.